



Install Instructions for RSJL01- JEEP JL 7in Headlight Mounting Bracket Kit


1. Let's begin by pulling off the tabs that hold the front grill on. Then removing the grill by pulling on the grill it has pressure tabs along the bottom of the grill.



2. The next step is to remove the actual headlight assemblies by removing 10mm bolts (QTY.3), unplug factory plug from the headlight assembly and set it aside.



3. Once the assembly has been removed, you may plug in your adapters. One adapter is to convert the plug over to an H4 plug, the next plug is to interface the new 7" round to the vehicle.

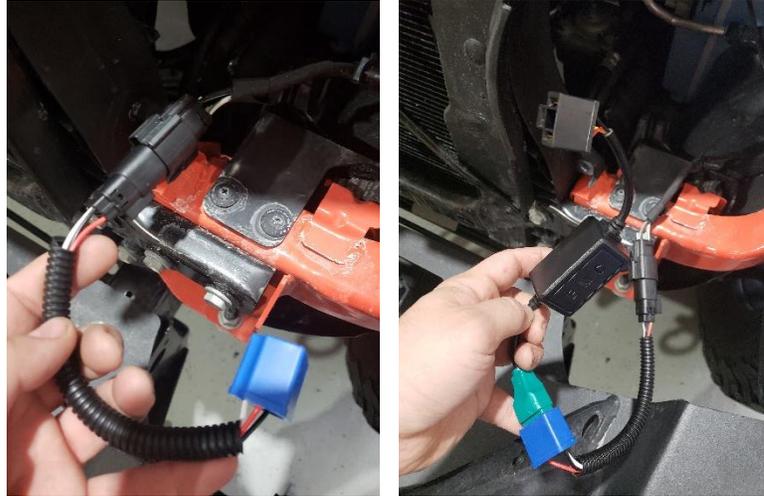

4. Once all necessary connections have been made you may mount new adapter rings using factory bolts.



5. Next step is to remove the outer ring by removing 3 phillips screws.



6. Plug in new headlight assembly and align the notches on assembly with new adapter bracket and screw in the ring to hold new assembly in place.



Test the new lights and make sure everything is functional, you may also check headlight adjustment if it off the you may adjust the headlights using the adjustment screw.



7. Once everything has been tested and adjusted you may reassemble the vehicle.



If any questions, please call us at 847-327-0073 ext.3