

# 2013-CURRENT DODGE RAM 2500

DHDHB17UP (P/N# 1007670)

DHDHB17UPSL (P/N# 1007672)



SCAN TO WATCH  
YOUTUBE VIDEO




Tech Support: (847) 327-0073 Ext. 3

## Kit Contents:

- (2) Hitch Bar Lights (Left & Right)
- (1) 25' 2-Output Power Harness
- (2) Pigtails


## STEP 1: HITCH BAR™ INSTALL

Install the hitch bars into the end of hitch (FIG A), the single bolt hole will immediately be available (FIG B), remove bolt from truck. Rotate bars into place and reinstall stock bolt.

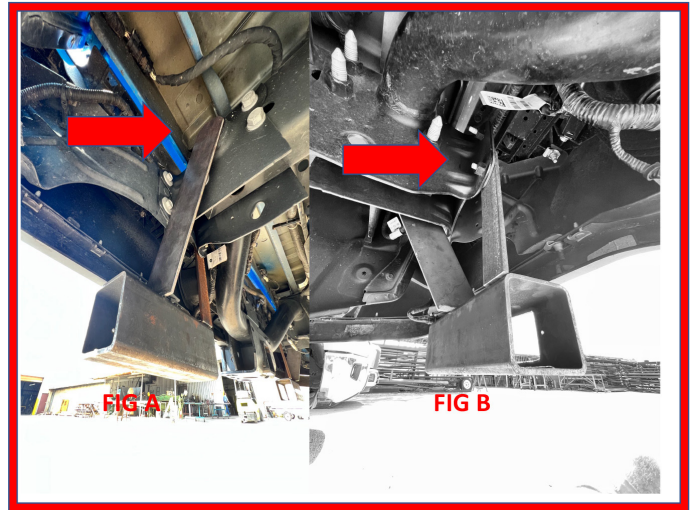

## STEP 2: HARNESS INSTALLATION

1. Starting at the passenger rear corner lay out your harness so that the long side (A) is facing the left side
2. Route the (A) side of the harness over the trailer hitch to the left hitch bar
3. Route the (B) side of the harness to the right side hitch bar
4. Secure by inserting and twisting close the IP68 waterproof connectors to each hitch bar
5. Route the 25' (C) side of harness along passenger side frame rail to power source or switch in the front of the vehicle
6. Go back through your wiring and secure wires as needed. Ensure harness does not contact any moving or hot parts of the truck
8. Connect the wires at the end of (C) to applicable on/off upfitter switches or control boxes in your truck. (See wiring diagram to the right)
9. Adjust hitch bars as needed for optimal coverage. Test power to all lights and secure any loose wiring.

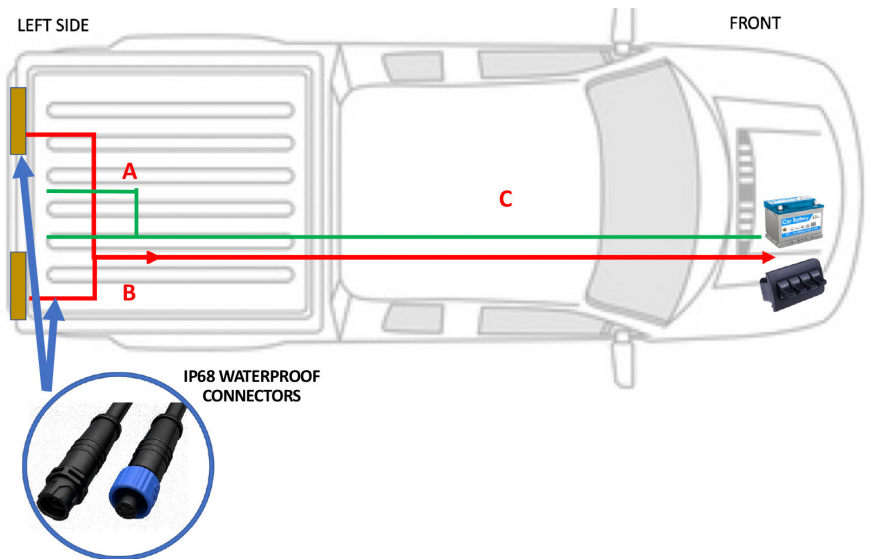

### HARNESS ORIENTATION

- A) 5' SIDE OF HARNESS
- B) 3' SIDE OF HARNESS
- C) 25' EXTENSION TO POWER SUPPLY

### HARNESS WIRE COLOR KEY

OUTER PLUGS (FOR HITCH BARS) RED/BLACK

INNER PLUGS (FOR AUXILIARY OUTPUT) WHITE/GREEN

